# roman blinds

fittings

1 Brackets:
quantity to suit
length of blind

2 Cleat &
2 screws

3 Wood screws:
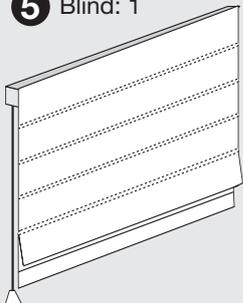min 4

4 Screws: min 4
Rawl plugs:
min 4

5 Blind: 1

fitting instructions

Outside Recess
If fitting the blind outside the window, measurements **(C)** will need to be the same. To work out **(C)**, simply minus **(B)** from **(A)** and divide the answer by two. Follow instructions for FACE FIXING

Inside recess
Decide whether to FACE or TOP FIX. FACE FIX to fit the bracket to the window frame. TOP FIX to the lintel if the window frame is uPVC, or if there are any obstructions, e.g. window handles.

A WIDTH OF BLIND
**C** **B** **C**

TOP FIX   FACE FIX
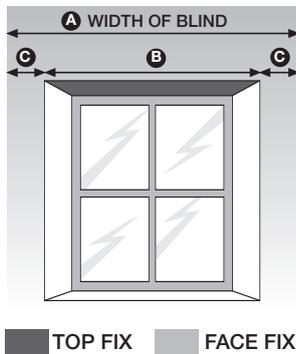
step one

Place blind in fitting position. Space the brackets evenly.

B   B   B

**B** Possible bracket positioning

step two

Top Fixing
Measure the distance that any handles protrude from the frame, **A**. Mark this measurement on the lintel and use it to position the back of the bracket. Mark the position of holes **B** and screw bracket to lintel using screws and rawl plugs supplied.
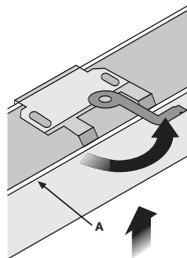
B
A
B
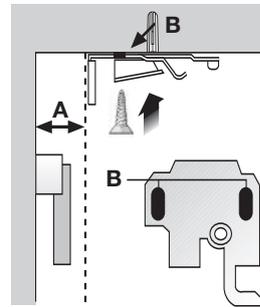
Face Fixing
Position bracket with swing arm facing towards you, and mark holes **B**. Screw bracket in place. Use rawl plugs if fitting to the wall.
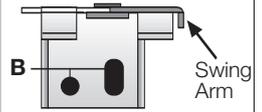
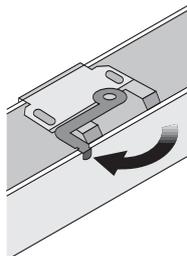B   Swing
           Arm

step three

Push swing arm anti-clockwise as far as it will go. Now clip the blind over the bracket, first easing the front lip of the headrail **A** in to place.
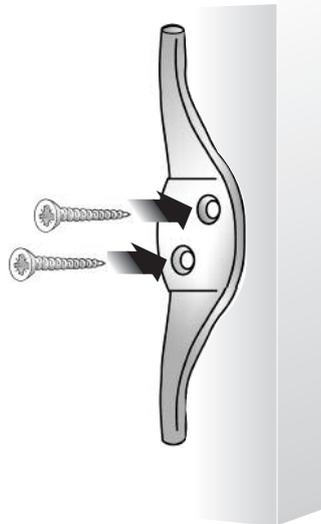
A

Push swing arm clockwise until it locks in to place, firmly holding the blind headrail.
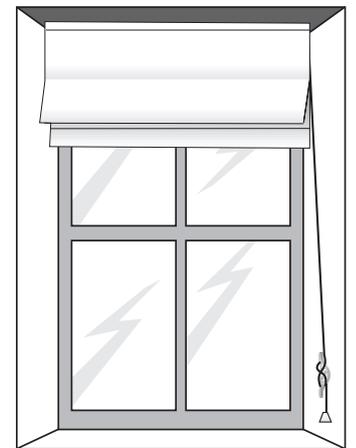
step four

Fix the cleat to the frame or wall in an easy-access position. Screw cleat into place using the screws supplied.

step five

The fabric of the Roman blind attaches to the headrail with Velcro.

Pull side cords to open the blind, and tie them to the cleat to keep the blind raised.

step six

WARNING

IN THE INTEREST OF SAFETY, IT IS ADVISABLE TO KEEP ALL PULL CORDS AND CHAIN/BEAD CORDS OUT OF THE REACH OF CHILDREN.